

CODEL

A Forbes Marshall Company

Product Brochure

Dustroid - Ambient Dust Monitor



Real-time Ambient Dust Monitoring

Monitoring Solutions

ISO 9001:2015

Quality Certification

ISO 14001:2015

Environmental Certification

www.codel.co.uk

Dustroid is an Online Particulate Monitoring system to measure the concentration of dust particles in the ambient air. It is capable of monitoring various particulate size ranging from 1 micron to 100 microns such as Ultrafine Suspended Particulate Matter (UFPM), Suspended Particulate Matter (SPM), Respiratory Suspended Particulate Matter (RSPM) and Total Suspended Particulates (TSP). It works on Active Sampling method to count particulate matters using a highly accurate laser beam.

CODEL International was formed in 1982 primarily for its design and manufacture of carbon monoxide monitors for process control applications. Since then, environmental protection and increasing regulation in this sector has moved our focus to producing world class emissions monitoring analysers.

Today our monitoring systems are supplied throughout the world to a wide range of industries including glass production, cement, power generation, pharmaceuticals and biomass.

Features and Benefits

- ▶ Ultimate durability and weather resistant
- ▶ Over-The-Air Update
- ▶ Light-weight and compact system
- ▶ On-device calibration and Real-time data
- ▶ Plug and play design for ease of implementation
- ▶ Heated Inlet to dehumidify the sample for better accuracy

Typical Applications

- ▶ Smart Cities
- ▶ University Campuses
- ▶ Anaerobic Digester Plants
- ▶ Motorways
- ▶ Water Treatment Plants
- ▶ Quarries
- ▶ Landfill Sites
- ▶ Energy from Waste Plants

Functional Specification


Dustroid

Proper location selection is critical for optimized data collection. It varies as per the purpose of the project. According to USEPA QA handbook (Vol II, Section 6.0 Rev.1), the selection of locations should be based on monitoring purposes such as:

- Real-time air quality public reporting
- Research monitoring
- Trends monitoring
- Compliance monitoring
- Emergency episode monitoring

Installation

| | |
|----------------------|---|
| Preferred Mounting | Pole / Wall (Preferably 270° open surrounding) |
| Installation Height | 12-15 feet (4-5 meters) |
| Direction | As per maximum direct sunlight exposure (if ambient-light monitoring is a preference) |
| Power Availability | Constant AC supply within a 2-meter range from the unit or solar panel |
| Network Availability | Uninterrupted network connection |

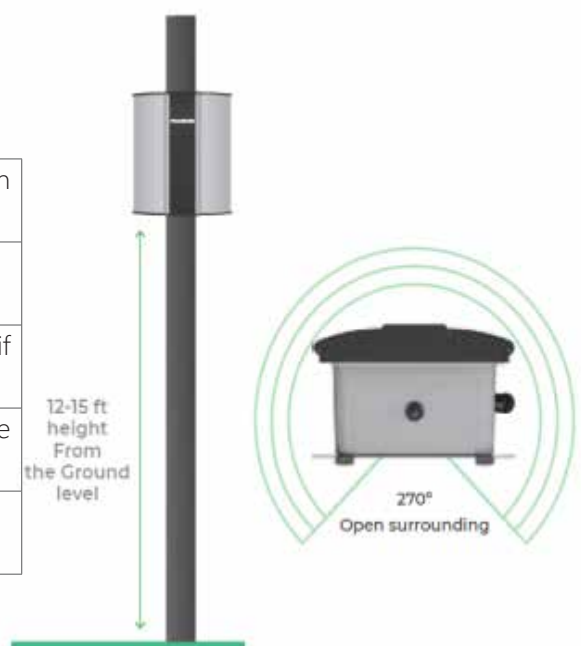

Technical Specifications

| | |
|-----------------------|--------------------------|
| Processor | Quad Core ARM Cortex |
| Memory | 2GB RAM / 8GB eMMC ROM |
| Device Interface | On-device Software / API |
| Operating Temperature | -20 °C to 60 °C |
| Operating Humidity | 0-95% RH |

Communication

| | |
|----------------------|---|
| Data Interval | 2-30 minutes (configurable) |
| Data-push Protocol | HTTP post request to host-server |
| Data-pull | HTTP request on device IP |
| Firmware Updates | Over-The-Air Firmware Update |
| Standby Connectivity | GSM (2G/3G) for remote diagnosis, FOTA updates, and cloud calibration |

Power

| | |
|------------------------|---|
| Avg. Power Consumption | 5 Watt (Actual consumption depends upon the number of parameters) |
| Power Input Options | External 110-230V AC 50-60Hz, 40Watt Monocrystal Solar Panel |
| SMPS Specs | 24V, 2Amps output UL-62368 & CAN/CSA C22.2 Certified |
| Battery Backup Time | 12 Hours (not available in Pro variant) |
| Battery Specs | Lithium iron phosphate (LiFePO4) battery cell with rated voltage 12.8V Capacity 6Ah |

Parameters

| ID | Parameter | Range | Resolution | Min Detection | Error | Working Principle | Measurement Principle | Flow Rate | Expected Sensor Life |
|-------|--|--------------------------|-----------------------|---------------------|-----------------|-----------------------------------|-----------------------------------|-----------|----------------------|
| PM1 | Ultra-fine Particulate Matters with size less than 1µ | 0-5000 µg/m ³ | 0.1 µg/m ³ | 1 µg/m ³ | Up to ± 10% | Optical Particle Counter | Continuous Flow Active Monitoring | 1 L / min | 1.5 years |
| PM2.5 | Suspended Particulate Matters with size less than 2.5µ | | | | | | | | |
| PM10 | Suspended Particulate Matters with size less than 10µ | | | | | | | | |
| PM100 | Total Suspended Particulates (TSP) | | | | | | | | |
| Temp | Temperature | -40 °C to +125 °C | 0.01 °C | -40 °C | N.A | Solid State Semiconductor Sensing | Passive Monitoring | N.A | 3 Years |
| Hum | Humidity | Up to 100% Rh | 0.1 % | 0.1 % | N.A | | | | |
| Bmp | Barometric Pressure | 300-1100 hPa | 0.18 Pa | 300 hPa | ±1.0 hPa / Year | | | | |

Parameters

| ID | Parameter | Range | Resolution | Min Detection | Working Principle | Expected Sensor Life |
|-------|---------------------|--------------|------------|---------------|-------------------|----------------------|
| Ws | Wind Speed | 0-40 m/s | 0.1 m/s | 0.1 m/s | Ultrasonic | 3 years |
| Wd | Wind Direction | 0-359° | 1° | 1° | | |
| Rm | Rainfall Monitoring | N.A | 0.5 mm | 0.5 mm | Tipping Bucket | |
| Noise | Ambient Noise | Up to 140 dB | 1 dB | 30 dB | Capacitance | |

CODEL

A Forbes Marshall Company

CODEL International LTD
Unit 4
Station Road
Bakewell, Derbyshire
DE45 1GE

Tel : +44 (0)1629 814351
Fax : +44 (0)1629 566307
Web : www.codel.co.uk
email : Sales@codel.co.uk



Distributor

Monitoring Solutions

www.codel.co.uk